Bestchamte Lighting Limited

3/F, #C Building, GaoPu Industrial Districts, JiaoXin, Shijing, Baiyun, Guangzhou

TEL: +86-20-29052212 Mobile: +86-13201749212

Email: manager@bestchamte.net Website: www.bestchamte.com



LED Moving Head 36PCS With ZOOM, Touch Screen, Powercon Input & Output 4IN1/5IN1/6IN1

Item No.: LED-3610/LED-3615/LED-3618 Voltage:AC90V-240V/50-60Hz

Power: 300W/400W/500W LED: 36*10W/15W/18W

Color: RGBW/RGBWA/RGBWA+UV

Control Mode: DMX512, Master-Slave, Sound activated,

Auto

Control Channels: 12 CHs

Dimmer: 0-100% Linear Dimmer

Pan : 540 ° Tilt : 260 ° N/W: 9KG G/W : 11KG

















LED Moving Head 37PCS 15W 4IN1 RGBW With **ZOOM** Item No.: LED-3715

Voltage: AC90-240V 50-60Hz

Power:700W

Movement PAN 540 °TILT 250 °16bit fine adjustment

DMX channel: 18CH /42CH LED: 37*15W 4IN1 RGBW

Control: DMX512, self-propelled, voice control, Artnet

(optional)

Beam angle 4-60 ° adjustable

Strobe: 1-25 times / sec with multiple strobe effects

Dimming: 0-100% linear dimming.


With RDM function, you can modify the DMX address and

display related parameters through the console.







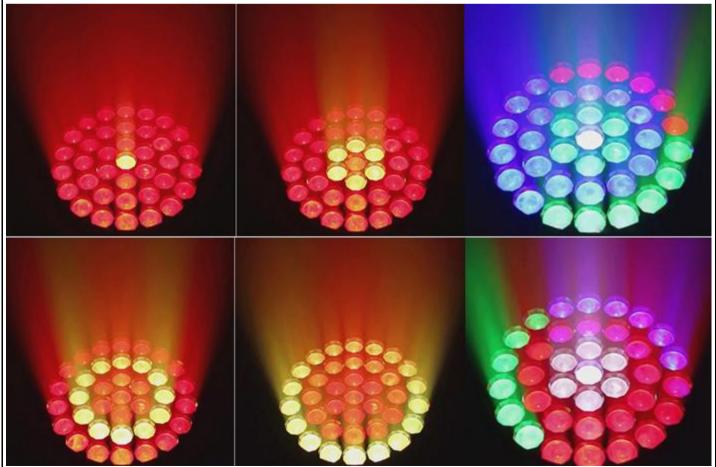



LED SPOT Light 200W

Item No.: LED-200 Angle of Light: 14 °

One fixed gobo: 7 fixed gobo + white light

One rotating pattern plate: 6 interchangeable rotating patterns

+ white light

Color: one color disc, 7 colors + white light, with half color

and rainbow water effect

Prism: 6 + 12 prism (optional mirror) Dimming: 0 ~ 100% linear dimming Strobe: 0 ~ 20Hz, a variety of strobe...

Focusing: Autofocus

Special effect: a colorful halo, with horse racing, chasing, color

change and other functions

Display screen: LCD display screen

Channel: 22 CH

Control Mode: DMX512, Self Walking, Master From, Voice

Control, Built in


Angle of swing of lamp body: 540 °horizontal; 270 degrees


vertical;

Automatic return correction function

Net weight: 10 KG Gross weight: 12 KG

Package size: 45 * 33 * 34CM

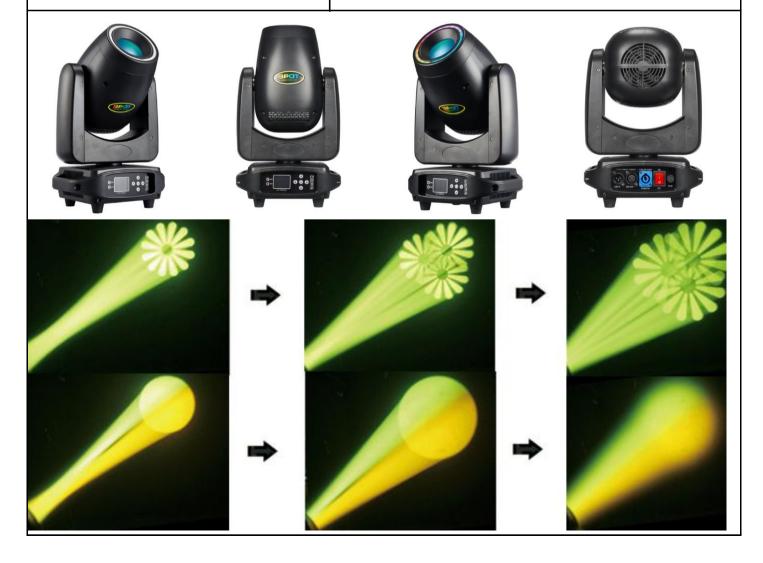

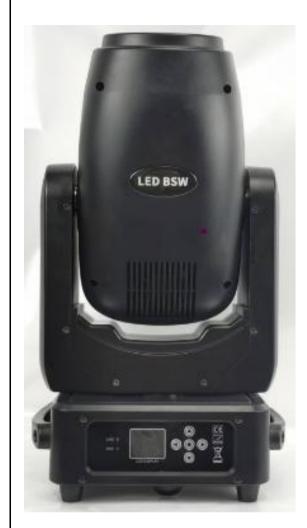

LED BEAM WASH SPOT 300W

Item No.: LED-300

Input voltage: AC110V240V50 60HZÂ

Rotation pattern: 7 glass patterns + white light, each glass

pattern can be independently positive and negative

Color: 9 + white light

Fixed pattern: 9 fixed modes + white light

Light source: 300 W

Prism system: standard 3 prisms, independent front and rear

Light source life: 50000 hours

Macro function: console reset function, self-walking mode,

master and slave mode Positive power: 350 W

Display mode: key operation mode

Channel mode: 17CH control signal: international standard

DMX512, with RDM function.

Software can be updated online, dial the address code

Horizontal scanning: 540 degrees (16-bit precision scanning)

Electronic error correction

Vertical scanning: 270 degrees (16-bit precision scanning)

Electronic error correction

Cooling mode: axial fan for enhanced cooling Dimming system: 0-100% linear adjustment

Appearance material: high temperature resistant plastic Atomization system: 1 independent atomization effect, light

spot soft and natural

Working environment: -20 degrees -40 degrees

Magnification Angle: "Beam 3-16 degrees, pattern 9-32

degrees"

Protection Level: IP20

High speed strobe: 0-30 times / second, speed control strobe

effect adjustable

Product Size: 53 * 42 * 37CM

Product weight: 13 kg







LED BEAM WASH SPOT CMY 500W

Item No.: LED-500

Color temperature: 8000 K color index: 75 Input voltage: AC110V - 240V / 50 - 60Hz

Light source specification: 500 W white LED module

Light source life: 50000 hours

Luen: 4 m 80000 lm Total power: 700 W

Channel mode: 22 channels

Level: 540 degree (16 bit) Electronic Error Correct Verticality: 270 degree (16 bit) Electronic error correct Light System: 0 -

100% Line Regulation

Focusing system: linear adjustment 4 meters to 50 meters atomization system: 1 independent atomization effect, soft and natural spot

natural spot

Magnification Angle: 4-35 degrees

High speed strobbing: 0 - 30 times / sec. Variable speed strobbing effect. Strobbing Color: 7 colors + white light. Color half color function color system: independent CMY color mixed system.

Color temperature: 3200 K8000K

Fixed pattern: 11 fixed pattern + white light

Rotating pattern: 8 glass patterns, each glass pattern can be


independently reversed

Prism system: standard single 3 prism and 8 prism, each prism

can be independently positive and negative rotation

Micro function: Control panel reposition function, self-walking mode, master and from mode display mode: LCD display, button + touch dual mode control signal: international standard DMX512. With RDM function, online software upgrade, dial address code Cooling mode: axial fan to enhance cooling

Safety device: with electronic temperature con

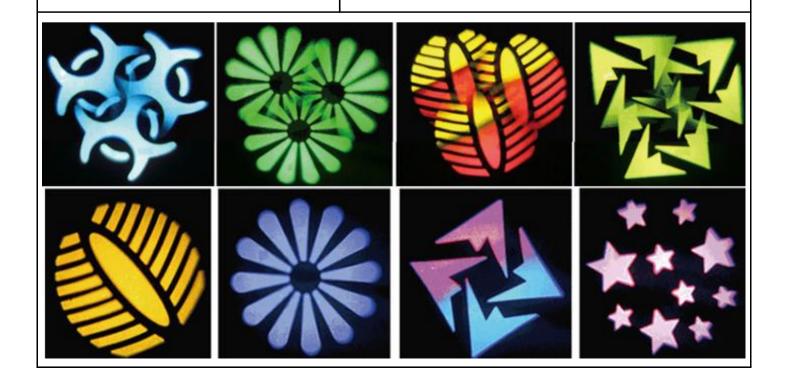





Item No.: LED-0740 Beam Angle:4 \(^{2}\) 60 \(^{8}\)

Power Consumption: 280W

Power Voltage: AC 100-240V, 50/60Hz

DMX Channel: 12/17 Channel Control Modes: DMX512,

Pan/Tilt: 540 % 270 ° Pan/Tilt Resolution: 16 bit

Display: LCD Display

Dimmer: 0~100% smooth dimming Fast, quiet operation and flicker free



Wash Bee Eyes with **ZOOM** 12*40W,4in1 RGBW

Item No.: LED-1240 Beam Angle:4.5 °- 45 ° Power Consumption: 300W

Power Voltage: AC 100-240V, 50/60Hz

DMX Channel: 17CH/58CH/18CH/11CH Features: Scan position memory,auto reposition after unexpected movement RGBW color mixing system, color

effect, Macros effect

Strobe effect with 18 flashes per second and pulse effect General dimming and blackout for all four colors Built-in dual

uniformity bright LED shutter, LED dimming, LED rainbow

temperature control function



Bee Eyes with **ZOOM** 19*40W,4in1 RGBW

Item No.: LED-1940

Beam Angle:4 °-60 °Electronic Zoom angle

Power Consumption: 500W

Power Voltage: AC 100-240V, 50/60Hz DMX Channel: 21CH/35CH/78CH Color temperature: 2500 - 8000 k DMX512:3/5-pin XLR IN-OUT sockets

DWAS 12.3/3-pill ALK IN-OUT SOCKERS

Effect: Three operating modes: wash, beam ,Front Lens Bidirectional Rotation ;Digital Wash-Beam Framing effect

Beam edge softening control, Linear Dimmer: 0-100%



LED Moving Head Wash 19*15W,4 in 1 with **ZOOM**

Item No.: LED-1915

Voltage: AC 90-240v, 50/60Hz Power consumption: 280w

Lighting Source: 19 pcs 15w LED RGBW 4IN1 Control: DMX, master slave, sound active, auto mode.

Beam angle: 5-60° Display: LCD display

N.W.: 9 kg

size: 290×210×400mm



LED Diamond Matrix 36*15w RGBW 4IN1 LED Item No.: LED-3615

Power:500w

Light Source:36*1w RGBW 4IN1 LEDs

Life span:>50,000 hours

Switch Power Supply:Built-in and auto switching

Beam Angle:38°

Control Mode:DMX, Auto and Master/Slave DMX Channels:8/80 CH,Built-in Auto programs

Electronic Dimmer:0-100% linear dimmer Electronic Strobe:1-20 flashes/second

Cooling:Forced Air Convection, with 4 Fans

Setting and Addressing:4-digit LED



Power: 450w

LEDS: 10*40W RGBW LED

DMX Channels: 5/7/14/18/42/54CH

Control: DMX512, master/slave, Auto, Sound

18 times/s high-speed strobe

Beam angle: 2°

flicker free 10kHz dimming refresh PWM stroboscopic, shooting, camera without flicker.

size: 116*18*32.5CM

weight: 14kg

